


1237

Digiality 8/1+1 DiSEqC switch+combiner

PRODUCT VISUAL

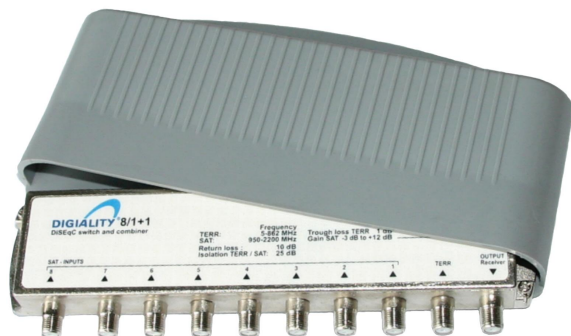

PRODUCT DESCRIPTION

The Digiality 8/1 + 1 is suited for selection of 8 satellite systems and the terrestrial signals with one satellite receiver

FEATURES

- Switching til different inputs by DiSEqC-commands - Position / Option and by using uncommitted switch 1
- Use only receiver with DiSEqC 1.1 or 2.1
- The switch doesn't need an additional power supply unit
- The switch is suited for universal single, twin and switching quatro LNB's

TECHNICAL SPECIFICATIONS

Frequency area

Sat.: 8 x 950 - 2200 MHz

Terr.: 5 - 862 MHz

DiSEqC-control

DiSEqC 1.1, DiSEqC 2.1

Linearity

± 1 dB

Functions

Position / Potion / Uncommitted switch 1

Output level

105 dB μ V

Gain

Sat: 12 dB ± 1 dB

Adjustable gain

0 - 15 dB

Return loss

10 dB

DC loop through

Max. 400 mA

Isolation

> 25 dB

Current consumption

< 65 mA

Dimensions (WxHxD)

212 x 20 x 60 mm / 220 x 30 x 120 mm

Weight

380 g

Operating temperature

-30° C ~ 60° C